


Technical Data Sheet Protector

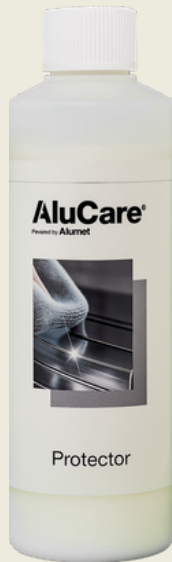

Protects anodized aluminium

Protector is a protective treatment for clean anodized aluminium surfaces. It forms a clear, thin protective layer on top of the anodized finish, helping to reduce the build-up of dirt caused by weather, traffic pollution, and general environmental exposure. This makes routine cleaning easier and helps keep the surface looking uniform for longer. Use undiluted. Suitable for anodized aluminium on façade elements, window and door frames, panels, trims, and other architectural applications with smooth anodized finishes.

Suitable for anodized aluminium on façade elements, window and door profiles, panels, trims, and other architectural components.

Technical Properties

- Application temperature: 10 to 20 °C
- Specific weight: 1 kg/L
- Do not use in direct sunlight or at high temperatures
- Professional use
- Unaffected by frost and high temperatures (during storage/transport)
- pH: 7 (neutral)
- Antistatic
- Does not damage glass or sealing joints

Use

- Test the product on a small area before full use.
- Remove all dust and coarse dirt first; the surface must be clean and dry.
- Shake well before use.
- Apply Protec Alu to a clean, soft, lint-free cloth and rub in evenly over the anodized aluminium.
- Keep rubbing until no product residue remains, then buff the surface completely.
- Reapply when needed, depending on exposure and soiling level.

Package

- 500 ML
- 5 L